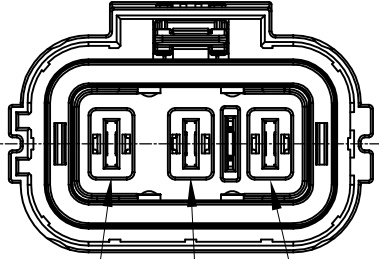
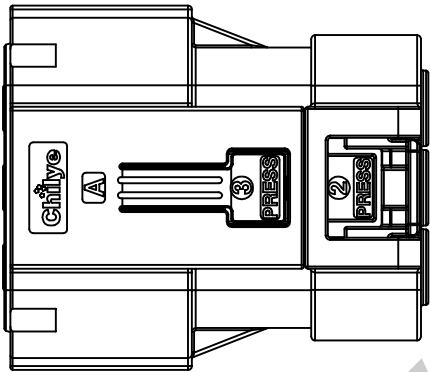
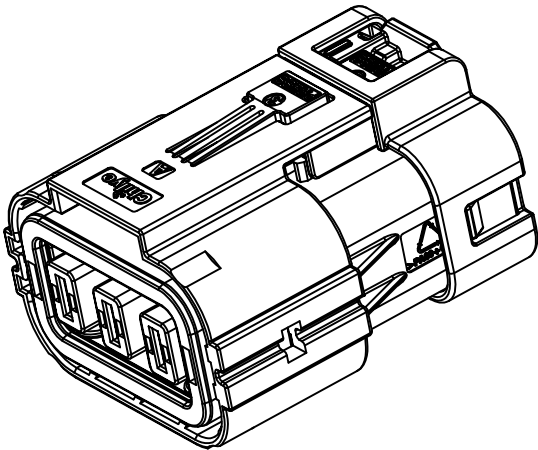
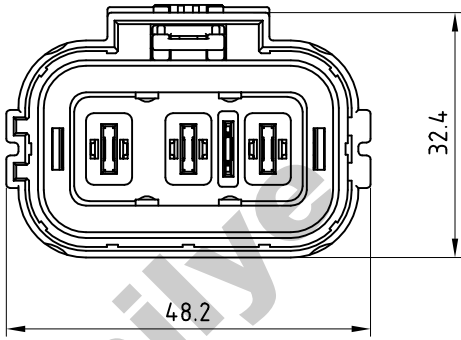
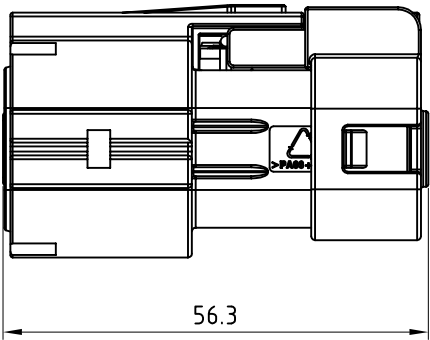
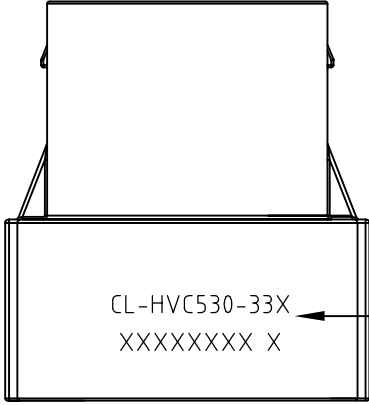


版 本 REV	工程变更号 ECN No.	变更描述 CHANGED DESCRIPTION	日 期 DATE	修改人 MODIFIED BY
A		首次发行(FIRST RELEASE)	2022/5/13	徐生超

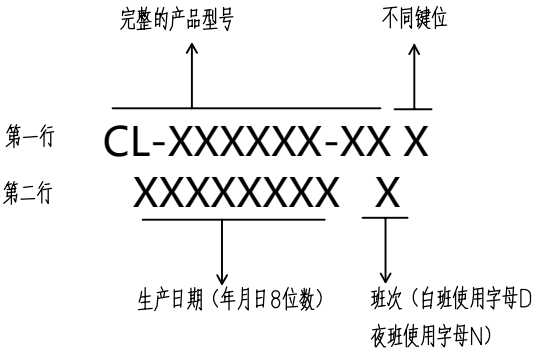


PIN孔示意图



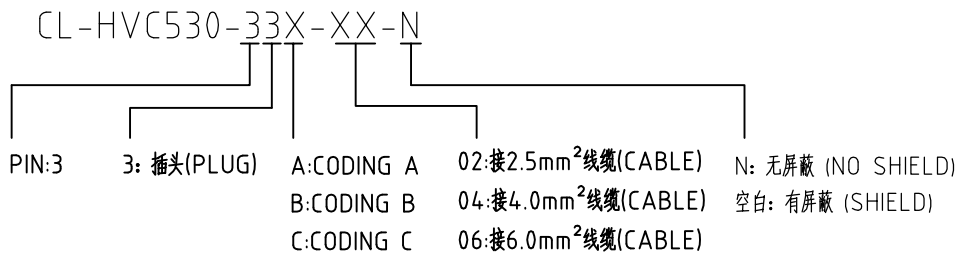
激光打标指定位置
(居中字体适当调整)



激光打标打标内容和格式说明:

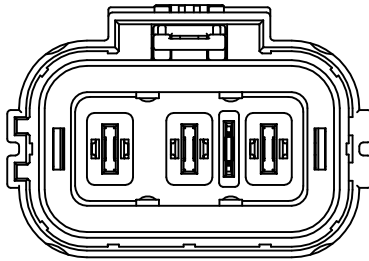
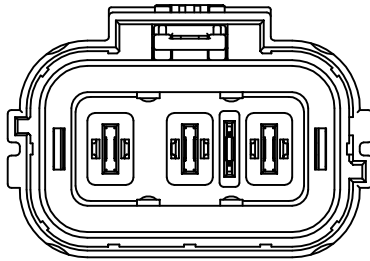
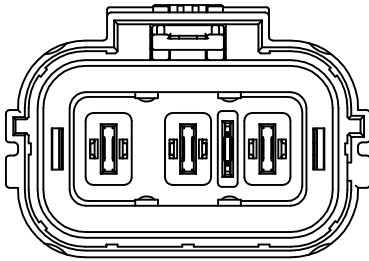
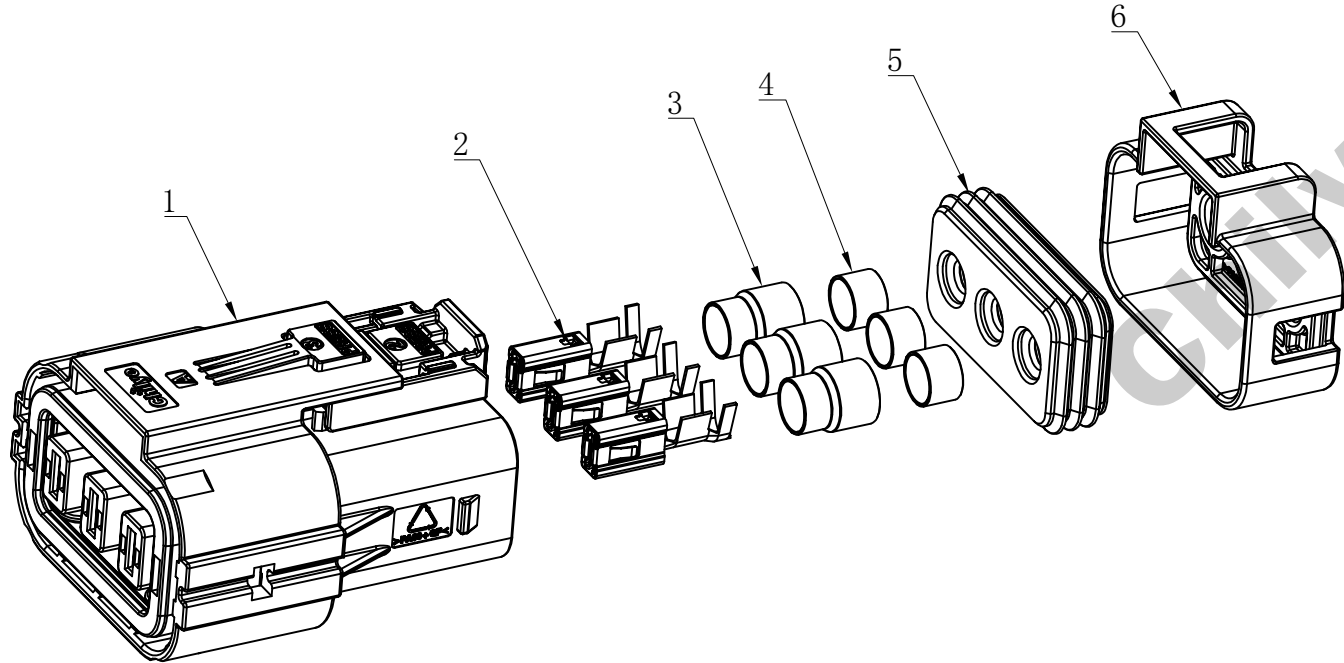








- 技术描述:
- 1. 插拔寿命: 大于100次;
DURABILITY IS MORE THAN 100 TIMES;
 - 2. 额定电压: 600V;
RATED VOLTAGE: 600V;
 - 3. 额定电流: 15A~40A;
RATED CURRENT: 15A~40A;
 - [C] 4. 绝缘阻抗: 200MΩ;
INSULATION RESISTANCE: 200MΩ;
 - [C] 5. 耐压: 2500V AC/min;
WITHSTANDING VOLTAGE: 2500V AC/min;
 - [C] 6. 防护等级: IP67, IP6K9K (已插合);
IP2XB (未插合);
IP RATING: IP67, IP6K9K (MATED);
IP2XB (UNMATED);
 - 7. 工作温度: -40℃至125℃;
OPERATION TEMPERATURE: -40℃至125℃;
 - [C] 8. 阻燃等级: UL94V-0。
FIRE RATING: UL94V-0。
 - [C] 9. 材料符合ROHS和REACH要求
THE MATERIAL MEETS ROHS AND REACH REQUIREMENTS

料号说明 (PRODUCT MODEL INSTRUCTION):



THE DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO CHILYE AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			Chilye 智绿			产品名称/PART NAME				
						HVC530 三芯插头总成 HVC530 3P PLUG ASSY.				
X.X ±0.5	X° ±1°	第一视角 PROJECTION	设计 DESIGNER	徐生超	2022/5/13	文件类型 DOCUMENT	图纸编号/DRAWING NUMBER			
X.XX±0.1	X.X°±0.5°		标准化 STANDARDIZATION			CAD	C-CL-HVC530-33X			
重量 WEIGHT			审核 CHECKED			图纸页数 SHEET	单位 UNIT	图纸 SIZE	比例 SCALE	版次 REV
材料 MATERIAL			核准 APPROVED			1/2	mm	A3	1:1	A

1		2		3		4		5		6		7		8					
 CODING A CL-HVC530-33A				 CODING B CL-HVC530-33B				 CODING C CL-HVC530-33C				ITEM	PART DWG.	MATERIAL	CABLE SIZE (mm ²)	PART NUMBER	D(mm)	QUANTITY SHIELD	QUANTITY NO SHIELD
				01		PA66+GF	2.5-6.0	CL100011008XX	—	1	1								
				02		铜合金	2.5-4.0	E1122003009	—	3	3								
							6.0	E1122003008	—	3	3								
				03		铜合金	2.5-4.0	C120001100202	6.6	3	0								
							6.0												
				04		铜合金	2.5-4.0	C1200011003	8.0	3	0								
							6.0												
				05		硅橡胶	2.5-4.0	C127001100701	2.5	—	1								
							6.0	C127003401301	3.4	1	—								
				06		PA66+GF	2.5-4.0	C122001103501	3.9	—	1								
6.0	C1220034073	6.0	1				—												
	C1220011035	6.7	1				1												

	非屏蔽线	屏蔽线		
6mm ²	4.0~5.3 mm	6.0~6.6mm		
2.5-4mm ²	2.8~3.8 mm	5.1~5.7 mm		
SIZE	OUTSIDE DIAMETER			
SCOPE OF CABLE OUTSIDE DIAMETER				
文件类型 DOCUMENT	图纸编号/DRAWING NUMBER			
CAD	C-CL-HVC530-33X			
图纸页数 SHEET	单位 UNIT	图纸 SIZE	比例 SCALE	版次 REV
2/2	mm	A3	1:1	A